

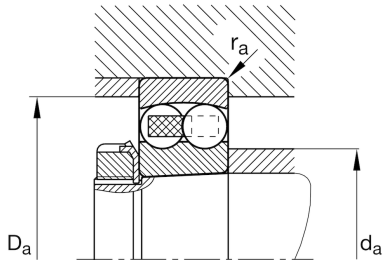
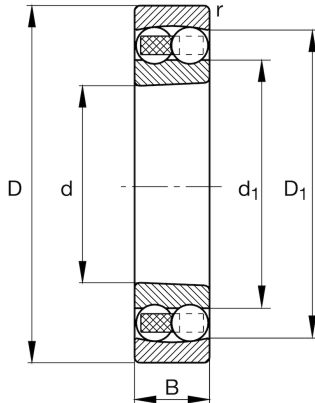
FAG

2206-K-TVH-C3

Self-aligning ball bearing

Schaeffler ID:
0389041360030Self-aligning ball bearing 22..-K-TVH,
tapered bore taper 1:12, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	20 mm	Width
r_{\min}	1 mm	Minimum chamfer dimension
C_r	26,000 N	Basic dynamic load rating, radial
C_{0r}	6,900 N	Basic static load rating, radial
C_{ur}	440 N	Fatigue load limit, radial
n_G	11,500 1/min	Limiting speed
n_{gr}	11,400 1/min	Reference speed
	0.003 kg	Weight

Dimensions

D_1	53.7 mm	Shoulder diameter outer ring
d_1	38.5 mm	Shoulder diameter inner ring

Mounting dimensions

$d_{a\min}$	35.6 mm	Minimum diameter shaft shoulder
$d_{a\max}$	38 mm	Maximum diameter shaft shoulder
$D_{a\max}$	56.4 mm	Maximum diameter of housing shoulder
$d_{b\min}$	33 mm	Minimum cavity diameter of the sleeve
$B_{a\min}$	5 mm	Minimum cavity width of the sleeve
$r_{a\max}$	1 mm	Maximum fillet radius

Calculation factors

e	0.31	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
	H306	Adapter sleeve
Y_1	2.01	Dynamic axial load factor
Y_2	3.11	Dynamic axial load factor
Y_0	2.11	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.