



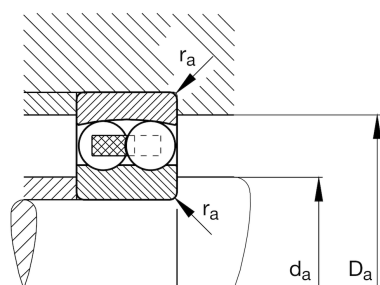
FAG

**2206-TVH**

Self-aligning ball bearing

Schaeffler ID:  
0167027940000Self-aligning ball bearing 22..-TVH, plastic  
cage

## Technical information

**Main Dimensions & Performance Data**

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	20 mm	Width
$r_{\min}$	1 mm	Minimum chamfer dimension
$C_r$	26,000 N	Basic dynamic load rating, radial
$C_{0r}$	6,900 N	Basic static load rating, radial
$C_{ur}$	440 N	Fatigue load limit, radial
$n_G$	11,500 1/min	Limiting speed
$n_{gr}$	11,400 1/min	Reference speed
	0.003 kg	Weight

**Dimensions**

$D_1$	53.7 mm	Shoulder diameter outer ring
$d_1$	38.5 mm	Shoulder diameter inner ring

**Mounting dimensions**

$d_{a\min}$	35.6 mm	Minimum diameter shaft shoulder
$D_{a\max}$	56.4 mm	Maximum diameter of housing shoulder
$r_{a\max}$	1 mm	Maximum fillet radius

**Calculation factors**

e	0.31	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y_1$	2.01	Dynamic axial load factor
$Y_2$	3.11	Dynamic axial load factor
$Y_0$	2.11	Static axial load factor

**Temperature range**

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	120 °C	Operating temperature max.