

FAG

**22210-E1-XL-K**


Spherical roller bearing

Schaeffler ID:  
0167035450000

Spherical roller bearings 222..-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

X-life

## Technical information

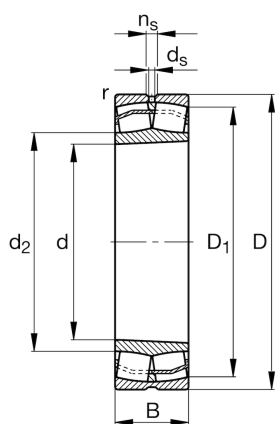

## Main Dimensions &amp; Performance Data


d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
$C_r$	109,000 N	Basic dynamic load rating, radial
$C_{0r}$	107,000 N	Basic static load rating, radial
$C_{ur}$	14,600 N	Fatigue load limit, radial
$n_G$	9,800 1/min	Limiting speed
$n_{gr}$	5,100 1/min	Reference speed
	0.585 kg	Weight

## Dimensions

$r_{min}$	1.1 mm	Minimum chamfer dimension
$D_1$	80.8 mm	Bore diameter outer ring
$d_2$	59.9 mm	Raceway diameter of the inner ring
$d_s$	3.2 mm	Diameter lubrication hole
$n_s$	4.8 mm	Width of lubricating groove

## Mounting dimensions

$d_{a min}$	57 mm	Minimum diameter shaft shoulder
$d_{a max}$	59 mm	Maximum diameter of shaft shoulder
$D_{a max}$	83 mm	Maximum diameter of housing shoulder
$r_{a max}$	1 mm	Maximum recess radius
$d_{b min}$	55 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	10 mm	Minimum cavity width of the sleeve

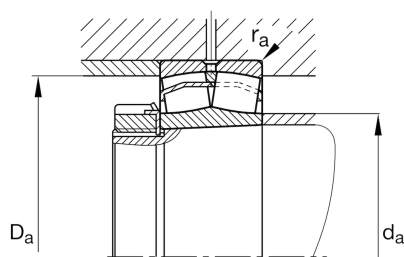

### Additional information

e	0.23	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
	H310	Adapter sleeve
Y <sub>1</sub>	2.95	Dynamic axial load factor
	AHX310	Withdrawal sleeve
Y <sub>2</sub>	4.4	Dynamic axial load factor
Y <sub>0</sub>	2.89	Static axial load factor

### Temperature range

T <sub>min</sub>	-30 °C	Operating temperature min.
T <sub>max</sub>	200 °C	Operating temperature max.