



FAG

22312-E1-XL-K


Spherical roller bearing

Schaeffler ID:
0167052970000

Spherical roller bearings 223...-E1-K, main dimensions to DIN 635-2, with tapered bore, taper 1:12

X-life

Technical information

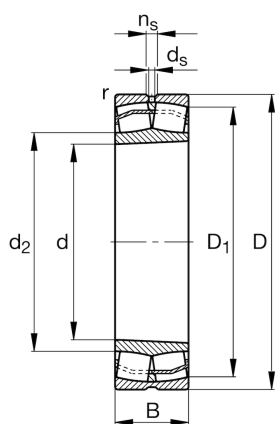

Main Dimensions & Performance Data


d	60 mm	Bore diameter
D	130 mm	Outside diameter
B	46 mm	Width
C_r	310,000 N	Basic dynamic load rating, radial
C_{0r}	310,000 N	Basic static load rating, radial
C_{ur}	29,000 N	Fatigue load limit, radial
n_G	5,400 1/min	Limiting speed
n_{gr}	4,200 1/min	Reference speed
	2.7 kg	Weight

Dimensions

r_{min}	2.1 mm	Minimum chamfer dimension
D_1	110.1 mm	Bore diameter outer ring
d_2	74.8 mm	Raceway diameter of the inner ring
d_s	3.2 mm	Diameter lubrication hole
n_s	6.5 mm	Width of lubricating groove

Mounting dimensions

$d_{a min}$	72 mm	Minimum diameter shaft shoulder
$d_{a max}$	74 mm	Maximum diameter of shaft shoulder
$D_{a max}$	118 mm	Maximum diameter of housing shoulder
$r_{a max}$	2.1 mm	Maximum recess radius
$d_{b min}$	66 mm	Minimum cavity diameter of the sleeve
$B_{a min}$	5 mm	Minimum cavity width of the sleeve

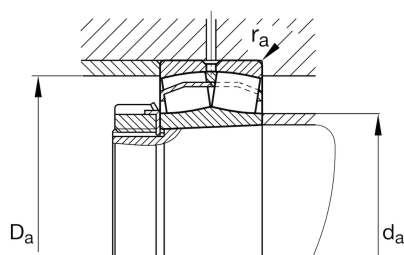

Additional information

e	0.35	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
	H2312	Adapter sleeve
Y ₁	1.91	Dynamic axial load factor
	AHX2312	Withdrawal sleeve
Y ₂	2.85	Dynamic axial load factor
Y ₀	1.87	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	200 °C	Operating temperature max.