



FAG


## 32034-X-XL

Tapered roller bearing

Schaeffler ID:  
0839598660000Tapered roller bearings 320, main  
dimensions to DIN ISO 355 / DIN 720,  
separable, adjusted or in pairs

X-life

## Technical information

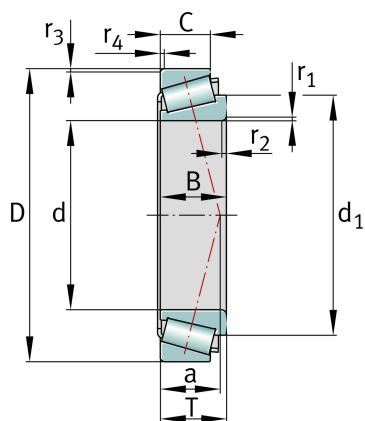

## Main Dimensions &amp; Performance Data

d	170 mm	Bore diameter
D	260 mm	Outside diameter
B	57 mm	Width, inner ring
C	43 mm	Width, outer ring
T	57 mm	Width, total
$C_r$	600,000 N	Basic dynamic load rating, radial
$C_{0r}$	880,000 N	Basic static load rating, radial
$C_{ur}$	122,000 N	Fatigue load limit, radial
$n_G$	3,050 1/min	Limiting speed
$n_{gr}$	1,690 1/min	Thermal speed rating
	10.5 kg	Weight

## Dimensions

$r_{1,2 \text{ min}}$	3 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	2.5 mm	Minimum chamfer dimension of outer ring back face
a	57 mm	Distance between the apexes of the pressure cones
$d_1$	214.5 mm	Guidance rib diameter of inner ring

**Mounting dimensions**

$d_{a \max}$	187 mm	Maximum diameter of shaft shoulder
$d_{b \min}$	182 mm	Minimum diameter of shaft shoulder
$D_{a \min}$	230 mm	Minimum diameter of housing shoulder
$D_{a \max}$	248 mm	Maximum diameter of housing shoulder
$D_{b \min}$	249 mm	Minimum diameter of housing shoulder
$C_{a \min}$	10 mm	Minimum axial space
$C_{b \min}$	14 mm	Minimum axial space
$r_{a \max}$	3 mm	Maximum fillet radius of shaft
$r_{b \max}$	2.5 mm	Maximum fillet radius of housing

**Calculation factors**

	T4EC170	Comparative designation to ISO 10317 and ISO 355
$e$	0.44	Limiting value of $F_a/F_r$ for the applicability of diff. Values of factors X and Y
$Y$	1.35	Dynamic axial load factor
$Y_0$	0.74	Static axial load factor

**Temperature range**

$T_{\min}$	-30 °C	Operating temperature min.
$T_{\max}$	200 °C	Operating temperature max.