

FAG


33016

Tapered roller bearing

Schaeffler ID:
0167133620000

Tapered roller bearings 330, main dimensions to DIN ISO 355 / DIN 720, separable, adjusted or in pairs

Technical information

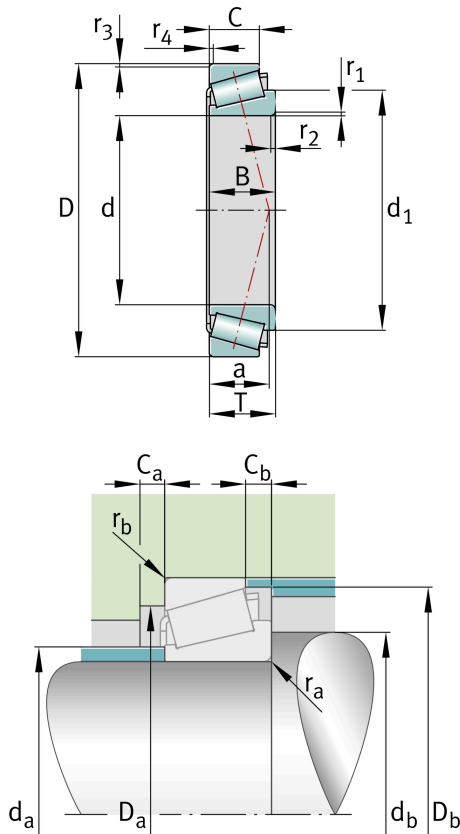

Main Dimensions & Performance Data

d	80 mm	Bore diameter
D	125 mm	Outside diameter
B	36 mm	Width, inner ring
C	29.5 mm	Width, outer ring
T	36 mm	Width, total
C_r	175,000 N	Basic dynamic load rating, radial
C_{0r}	290,000 N	Basic static load rating, radial
C_{ur}	38,000 N	Fatigue load limit, radial
n_G	5,400 1/min	Limiting speed
n_{gr}	3,550 1/min	Thermal speed rating
	1.625 kg	Weight

Dimensions

$r_{1,2 \text{ min}}$	1.5 mm	Minimum chamfer dimension of inner ring back face
$r_{3,4 \text{ min}}$	1.5 mm	Minimum chamfer dimension of outer ring back face
a	26 mm	Distance between the apexes of the pressure cones
d_1	102.6 mm	Guidance rib diameter of inner ring

Mounting dimensions

$d_{a \text{ max}}$	90 mm	Maximum diameter of shaft shoulder
$d_{b \text{ min}}$	87 mm	Minimum diameter of shaft shoulder
$D_{a \text{ min}}$	112 mm	Minimum diameter of housing shoulder
$D_{a \text{ max}}$	117 mm	Maximum diameter of housing shoulder
$D_{b \text{ min}}$	119 mm	Minimum diameter of housing shoulder
$C_{a \text{ min}}$	6 mm	Minimum axial space
$C_{b \text{ min}}$	6.5 mm	Minimum axial space
$r_{a \text{ max}}$	1.5 mm	Maximum fillet radius of shaft
$r_{b \text{ max}}$	1.5 mm	Maximum fillet radius of housing

Calculation factors

	T2CE080	Comparative designation to ISO 10317 and ISO 355
e	0.28	Limiting value of Fa/Fr for the applicability of diff. Values of factors X and Y
Y	2.16	Dynamic axial load factor
Y ₀	1.19	Static axial load factor

Temperature range

T _{min}	-30 °C	Operating temperature min.
T _{max}	120 °C	Operating temperature max.