
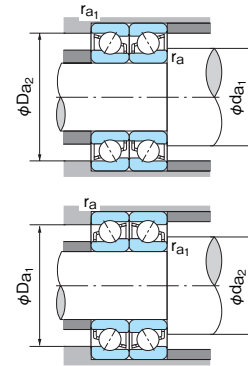


# Angular Contact Ball Bearings Single Mounting / Duplex Mounting

Bore Diameter: 40~55mm

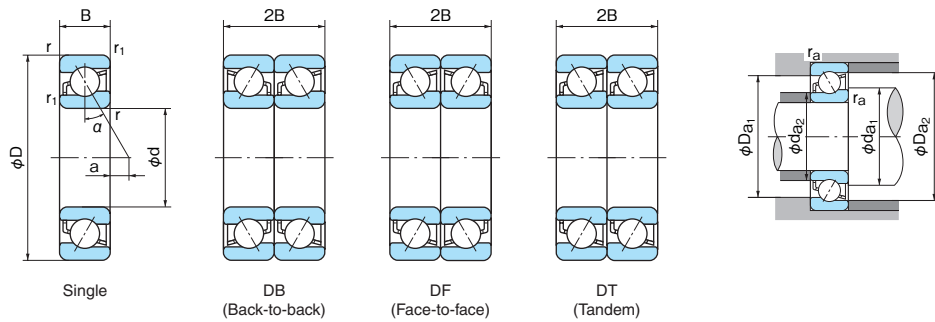

Dynamic equivalent radial load  
 $P_r = X F_r + Y F_a$

Contact angle	iFa/Cor	e	Single or DT				DB or DF			
			Fa/Fr > e		Fa/Fr ≤ e		Fa/Fr > e		Fa/Fr ≤ e	
			X	Y	X	Y	X	Y	X	Y
15°	0.015	0.38			1.47	1.65			2.39	2.28
	0.029	0.40	0.44	1.40	1	1.57	0.72	2.28	2.28	
	0.058	0.43		1.30		1.46		2.11	2.11	
	0.087	0.46		1.23		1.38		2.00	2.00	
	0.12	0.47	0.44	1.19	1	1.34	0.72	1.93	1.93	
	0.17	0.50		1.12		1.26		1.82	1.82	
	0.29	0.55		1.02		1.14		1.66	1.66	
	0.44	0.56	0.44	1.00	1	1.12	0.72	1.63	1.63	
	0.58	0.56		1.00		1.12		1.63	1.63	
	0.58	0.56		1.00		1.12		1.63	1.63	
30°	—	0.8	0.39	0.76	1	0.78	0.63	1.24	1.24	
	—	1.14	0.35	0.57	1	0.55	0.57	0.93	0.93	

Static equivalent radial load  
 $P_0 = X_0 F_r + Y_0 F_a$

Contact angle	Single or DT		DB or DF	
	X <sub>0</sub>	Y <sub>0</sub>	X <sub>0</sub>	Y <sub>0</sub>
15°	0.5	0.46	1	0.92
30°	0.5	0.33	1	0.66
40°	0.5	0.26	1	0.52

Single or DT mounting When  $P_0 < F_r$ , use  $P_r = F_r$

i = 2 for DB or DF mounting  
 i = 1 for Single or DT mounting  
 Single or DT mounting When  $F_a/F_r \leq e$ , use  $P_r = F_r$

Boundary dimensions (mm)					Load center (mm) a	Bearing No.				Basic dynamic load rating Cr (N)		Basic static load rating Cor (N)		Limiting speed (min <sup>-1</sup> )				Abutment and fillet dimensions (mm)					Mass (kg) Single	Bearing No.	
d	D	B	r (min)	r <sub>1</sub> (min)		Single	Duplex			Single	Duplex	Single	Duplex	Grease lubrication		Oil lubrication		d <sub>a1</sub> (min)	d <sub>a2</sub> (min)	D <sub>a1</sub> (max)	D <sub>a2</sub> (max)	r <sub>a</sub> (max)			r <sub>a1</sub> (max)
40	68	15	1	0.6	8.2	7008	7008DB	7008DF	7008DT	18800	30500	14500	29000	8500	6600	11000	9000	45	45	63	65	1	0.6	0.210	7008
	68	15	1	0.6	-1.3	7008C	7008CDB	7008CDF	7008CDT	20700	33500	16000	32000	15000	12000	20000	16000	45	45	63	65	1	0.6	0.210	7008C
	80	18	1.1	0.6	8.3	7208	7208DB	7208DF	7208DT	35000	57500	25200	50500	7500	6000	10000	8000	47	45	73	75	1	0.6	0.380	7208
	80	18	1.1	0.6	16.2	7208B	7208BDB	7208BDF	7208BDT	33000	54000	23700	47500	6700	5300	9200	7200	47	45	73	75	1	0.6	0.380	7208B
	80	18	1.1	0.6	-2.1	7208C	7208CDB	7208CDF	7208CDT	36500	59500	25400	50500	13000	10000	18000	14000	47	47	73	75	1	0.6	0.380	7208C
	90	23	1.5	1	7.3	7308	7308DB	7308DF	7308DT	49000	79000	33000	66000	7000	5500	9200	7500	49	45	81	84.6	1.5	1	0.655	7308
	90	23	1.5	1	15.8	7308B	7308BDB	7308BDF	7308BDT	46000	75000	31000	62500	6300	5000	8500	6700	49	45	81	84.6	1.5	1	0.655	7308B
90	23	1.5	1	-4.0	7308C	7308CDB	7308CDF	7308CDT	49500	80500	32500	65500	12000	9600	17000	13000	49	49	81	84.6	1.5	1	0.655	7308C	
45	75	16	1	0.6	9.3	7009	7009DB	7009DF	7009DT	22200	36000	17600	35000	7500	6000	10000	8000	50	50	70	72	1	0.6	0.265	7009
	75	16	1	0.6	-1.1	7009C	7009CDB	7009CDF	7009CDT	24600	40000	19400	39000	13000	10000	18000	14000	50	50	70	72	1	0.6	0.265	7009C
	85	19	1.1	0.6	9.3	7209	7209DB	7209DF	7209DT	39500	64500	28800	57500	7000	5500	9200	7500	52	50	78	80	1	0.6	0.430	7209
	85	19	1.1	0.6	17.8	7209B	7209BDB	7209BDF	7209BDT	37000	60500	27100	54000	6300	5000	8500	6700	52	50	78	80	1	0.6	0.430	7209B
	85	19	1.1	0.6	-2.0	7209C	7209CDB	7209CDF	7209CDT	41000	66500	29000	58000	12000	9600	17000	13000	52	52	78	80	1	0.6	0.430	7209C
	100	25	1.5	1	8.4	7309	7309DB	7309DF	7309DT	63500	103000	43500	87000	6300	5000	8500	6700	54	50	91	94.6	1.5	1	0.875	7309
	100	25	1.5	1	18.0	7309B	7309BDB	7309BDF	7309BDT	60000	97500	41500	82500	5600	4500	7500	6000	54	50	91	94.6	1.5	1	0.875	7309B
100	25	1.5	1	-4.1	7309C	7309CDB	7309CDF	7309CDT	63500	103000	43500	87000	11000	8800	15000	12000	54	54	91	94.6	1.5	1	0.875	7309C	
50	80	16	1	0.6	10.8	7010	7010DB	7010DF	7010DT	23600	38500	20000	40000	7000	5500	9200	7500	55	55	75	77	1	0.6	0.285	7010
	80	16	1	0.6	-0.5	7010C	7010CDB	7010CDF	7010CDT	26200	42500	22000	44000	12000	9600	17000	13000	55	55	77	77	1	0.6	0.285	7010C
	90	20	1.1	0.6	10.2	7210	7210DB	7210DF	7210DT	41000	67000	31500	63000	6300	5300	8500	6700	57	55	83	85	1	0.6	0.485	7210
	90	20	1.1	0.6	19.4	7210B	7210BDB	7210BDF	7210BDT	38500	63000	29600	59000	5600	4500	7500	6000	57	55	83	85	1	0.6	0.485	7210B
	90	20	1.1	0.6	-1.9	7210C	7210CDB	7210CDF	7210CDT	43000	70000	32000	63500	11000	8800	16000	13000	57	57	83	85	1	0.6	0.485	7210C
	110	27	2	1	9.6	7310	7310DB	7310DF	7310DT	74000	121000	52000	104000	5600	4500	7500	6000	60	56	100	104	2	1	1.14	7310
	110	27	2	1	20.1	7310B	7310BDB	7310BDF	7310BDT	70500	114000	49500	98500	5000	4000	6700	5300	60	56	100	104	2	1	1.14	7310B
110	27	2	1	-4.3	7310C	7310CDB	7310CDF	7310CDT	75500	122000	51000	102000	10000	8000	14000	11000	60	60	100	104	2	1	1.14	7310C	
55	90	18	1.1	0.6	11.9	7011	7011DB	7011DF	7011DT	31000	50500	26200	52500	6300	5000	8500	6700	61	61	84	86	1	0.6	0.420	7011
	90	18	1.1	0.6	-0.6	7011C	7011CDB	7011CDF	7011CDT	34500	56000	28800	57500	11000	8800	15000	12000	61	61	84	86	1	0.6	0.420	7011C
	100	21	1.5	1	11.9	7211	7211DB	7211DF	7211DT	51000	83000	39500	79000	6000	4500	7500	6300	64	60	91	94.6	1.5	1	0.635	7211
	100	21	1.5	1	22.1	7211B	7211BDB	7211BDF	7211BDT	48000	78000	37500	74500	5300	4000	7000	5500	64	60	91	94.6	1.5	1	0.635	7211B
	100	21	1.5	1	-1.6	7211C	7211CDB	7211CDF	7211CDT	53000	86500	40000	80000	10000	8000	14000	11000	64	64	91	94.6	1.5	1	0.635	7211C
	120	29	2	1	10.8	7311	7311DB	7311DF	7311DT	85500	139000	61500	123000	5000	4000	7000	5500	65	61	110	114	2	1	1.45	7311
	120	29	2	1	22.3	7311B	7311BDB	7311BDF	7311BDT	81000	132000	58000	116000	4500	3500	6200	5000	65	61	110	114	2	1	1.45	7311B
120	29	2	1	-4.4	7311C	7311CDB	7311CDF	7311CDT	87000	142000	60000	121000	9100	7300	13000	10000	65	65	110	114	2	1	1.45	7311C	

Remarks: 1. "a" means the distance between back face and load center.  
 2. See page 122 regarding limiting speeds.