

FAG


7308-B-XL-2RS-TVP

Angular contact ball bearing

Schaeffler ID:
0390296700000Angular contact ball bearing 73..-B-
XL-2RS-TVP, single row, X-life, seals,
plastic cage

X-life

Technical information

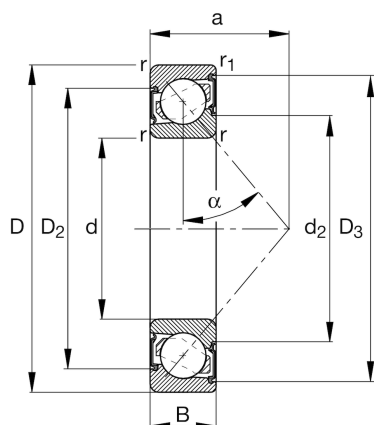**Main Dimensions & Performance Data**


d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
C_r	57,000 N	Basic dynamic load rating, radial
C_{0r}	34,500 N	Basic static load rating, radial
C_{ur}	2,390 N	Fatigue load limit, radial
n_G	4,650 1/min	Limiting speed
	0.631 kg	Weight

Dimensions

r_{min}	1.5 mm	Minimum chamfer dimension
r_{1min}	1 mm	Minimum chamfer dimension
D_1	71.3 mm	Shoulder diameter on outer ring wide side face
D_2	73.9 mm	Caliber diameter on outer ring wide side face
D_3	83.3 mm	Caliber diameter on outer ring small side face
d_1	60 mm	Shoulder diameter on inner ring wide side face
d_2	55.6 mm	Caliber diameter on inner ring wide side face
a	39 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Mounting dimensions

d_{amin}	49 mm	Minimum diameter of shaft shoulder
D_{amax}	81 mm	Maximum diameter of housing shoulder
D_{bmax}	84.4 mm	Maximaler Durchmesser der Gehäuseschulter
r_{amax}	1.5 mm	Maximum fillet radius of shaft
r_{a1max}	1 mm	Maximum fillet radius of housing

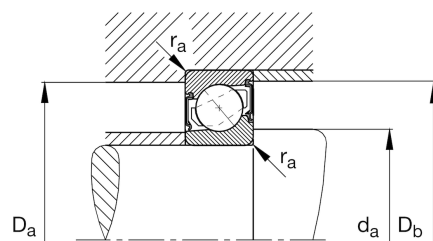

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	110 °C	Operating temperature max.