



## BHTS 330° (6200 Serie)

Ball Bearings for Extreme Temperature  
[ ONLY FOR AUTOMATIC LUBRICATION ]

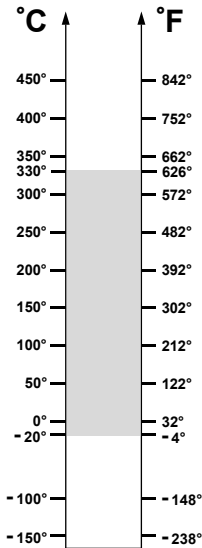

OPERATING RANGE: -20° / 330°C

ECONOMIC OPERATING RANGE: 200° / 330°C

Designation	Bore (B)	Diam (D)	Width (W)	Weight, g	Limiting Speed, RPM	Static Load, kN at 330°C	Static Load, kN at 20°C
6200 BHTS 330°	10	30	9	30	262	1,79	2,60
6201 BHTS 330°	12	32	10	37	242	2,14	3,10
6202 BHTS 330°	15	35	11	45	180	2,59	3,75
6203 BHTS 330°	17	40	12	65	175	3,28	4,75
6204 BHTS 330°	20	47	14	110	150	4,52	6,55
6205 BHTS 330°	25	52	15	130	140	5,52	8,00
6206 BHTS 330°	30	62	16	200	110	7,72	11,2
6207 BHTS 330°	35	72	17	290	100	10,55	15,3
6208 BHTS 330°	40	80	18	370	85	12,41	18,0
6209 BHTS 330°	45	85	19	410	80	14,06	20,4
6210 BHTS 330°	50	90	20	460	75	16,55	24,0
6211 BHTS 330°	55	100	21	610	67	20,00	29,0
6212 BHTS 330°	60	110	22	780	60	24,83	36,0
6213 BHTS 330°	65	120	23	990	53	28,62	41,5
6214 BHTS 330°	70	125	24	1040	50	30,35	44,0
6215 BHTS 330°	75	130	25	1210	50	33,79	49,0
6216 BHTS 330°	80	140	26	1400	50	37,93	55,0
6217 BHTS 330°	85	150	28	1800	50	44,14	64,0
6218 BHTS 330°	90	160	30	2150	50	50,69	73,5
6219 BHTS 330°	95	170	32	2500	50	56,21	81,5
6220 BHTS 330°	100	180	34	3150	50	64,14	93,0

OPERATING RANGE is the correct technical range in which can be used the bearing with good operating result.

ECONOMIC OPERATING RANGE is the range of temperature in which you can find, according to our study experience and know-how, the better relation price-quality-lifetime.