
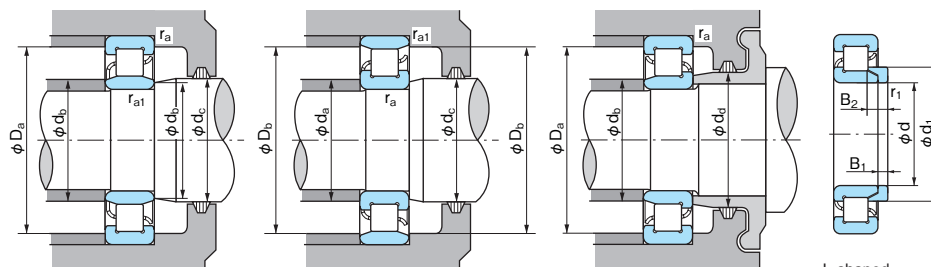


# Cylindrical Roller Bearings

Bore Diameter: 35~45mm

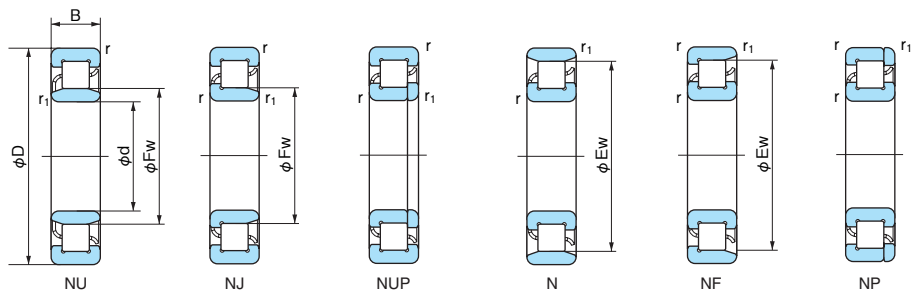

L-shaped thrust collar

1N=0.102kgf

Boundary dimensions (mm)							Bearing No.						Basic dynamic load rating Cr (N)	Basic static load rating Cor (N)	Limiting speed (min <sup>-1</sup> )(*)		Abutment and fillet dimensions (mm)								Mass (kg)		Dimensions of L-shaped thrust collar (mm)									
d	D	B	Ew	Fw	r (min)	r1 (min)	NU	NJ	NUP	N	NF	NP			Grease lubrication	Oil lubrication	da (min)	db (min)	db (max)	dc (min)	dd (min)	Da (max)	Db (max)	Db (min)	ra (max)	ra1 (max)	NU	N	Bearing No.	d	d1 (max)	B1	B2	r1 (min)	Mass (kg) Reference	
35	62	14	55	42	1	0.6	NU 1007	—	—	N	—	—	22600	23200	11000	13000	40	38.5	41	44	—	56	59	55.5	1	0.6	0.185	0.182	—	—	—	—	—	—	—	—
	72	17	61.8	43.8	1.1	0.6	NU 207	NJ	NUP	N	NF	NP	33500	31500	9500	11000	42	40	43	46	50	65	67	64	1	0.6	0.295	0.290	HJ 207	35	47.6	4	8	0.6	0.032	
	72	17	—	44	1.1	0.6	NU 207EG	NJ	NUP	—	—	—	50500	50000	8500	10000	—	40	43	46	50	65	—	—	1	0.6	0.300	—	HJ 207E	35	48.2	4	7	0.6	0.032	
	72	23	—	43.8	1.1	0.6	NU 2207	NJ	NUP	—	—	—	49000	51000	8500	10000	—	40	43	46	50	65	—	—	1	0.6	0.402	—	HJ 2207	35	47.6	4	8.5	0.6	0.033	
	72	23	—	44	1.1	0.6	NU 2207EG	NJ	NUP	—	—	—	61500	65000	8500	10000	—	40	43	46	50	65	—	—	1	0.6	0.446	—	HJ 2207E	35	48.2	4	8.5	0.6	0.035	
	80	21	68.2	46.2	1.5	1.1	NU 307	NJ	NUP	N	NF	NP	49500	47000	8000	9500	43.5	42	45	48	53	71.5	73	71	1.5	1	0.470	0.460	HJ 307	35	50.8	6	11	1.1	0.060	
	80	21	—	46.2	1.5	1.1	NU 307EG	NJ	NUP	—	—	—	66500	65500	7500	9500	—	42	45	48	53	71.5	—	—	1.5	1	0.490	—	HJ 307E	35	51.1	6	9.5	1.1	0.058	
	80	31	—	46.2	1.5	1.1	NU 2307	NJ	NUP	—	—	—	60500	60000	7200	8600	—	42	45	48	53	71.5	—	—	1.5	1	0.696	—	HJ 2307	35	50.8	6	14	1.1	0.067	
	80	31	—	46.2	1.5	1.1	NU 2307E	NJ	NUP	—	—	—	99000	109000	6800	8500	—	42	45	48	53	71.5	—	—	1.5	1	0.780	—	HJ 2307E	35	51.1	6	11	1.1	0.062	
	100	25	83	53	1.5	1.5	NU 407	NJ	NUP	—	NF	NP	75500	69000	6700	8000	43.5	43.5	52	55	61	91.5	91.5	84	1.5	1.5	1.05	1.02	HJ 407	35	59	8	13	1.5	0.120	
40	68	15	61	47	1	0.6	NU 1008	—	—	N	—	—	27300	29000	10000	12000	45	45	46	49	—	62	64	61.5	1	0.6	0.226	0.223	—	—	—	—	—	—	—	
	80	18	70	50	1.1	1.1	NU 208	NJ	NUP	N	NF	NP	43500	43000	8500	10000	47	47	49	52	56	73	73	72	1	1	0.369	0.360	HJ 208	40	54.2	5	9	1.1	0.049	
	80	18	—	49.5	1.1	1.1	NU 208EG	NJ	NUP	—	—	—	55500	55500	9500	9000	—	47	49	52	56	73	—	—	1	1	0.380	—	HJ 208E	40	54.1	5	8.5	1.1	0.047	
	80	23	—	50	1.1	1.1	NU 2208	NJ	NUP	—	—	—	58000	62000	7500	9000	—	47	49	52	56	73	—	—	1	1	0.490	—	HJ 2208	40	54.2	5	9.5	1.1	0.050	
	80	23	—	49.5	1.1	1.1	NU 2208EG	NJ	NUP	—	—	—	72500	77500	7500	9000	—	47	49	52	56	73	—	—	1	1	0.743	—	HJ 2208E	40	54.1	5	9	1.1	0.049	
	90	23	77.5	53.5	1.5	1.5	NU 308	NJ	NUP	N	NF	NP	58500	57000	6700	8500	48.5	48.5	51	55	60	81.5	81.5	80	1.5	1.5	0.665	0.650	HJ 308	40	58.4	7	12.5	1.5	0.090	
	90	23	—	52	1.5	1.5	NU 308EG	NJ	NUP	—	—	—	83000	81500	6700	8000	—	48.5	51	55	60	81.5	—	—	1.5	1.5	0.670	—	HJ 308E	40	57.7	7	11	1.5	0.084	
	90	33	—	53.5	1.5	1.5	NU 2308	NJ	NUP	—	—	—	82500	88000	6500	7800	—	48.5	51	55	60	81.5	—	—	1.5	1.5	0.956	—	HJ 2308	40	58.4	7	14.5	1.5	0.097	
	90	33	—	52	1.5	1.5	NU 2308E	NJ	NUP	—	—	—	114000	122000	6400	7700	—	48.5	51	55	60	81.5	—	—	1.5	1.5	1.05	—	HJ 2308E	40	57.7	7	12.5	1.5	0.090	
	110	27	92	58	2	2	NU 408	NJ	NUP	N	NF	NP	95500	89000	6000	7500	50	50	57	60	67	100	100	93	2	2	1.33	1.30	HJ 408	40	64.8	8	13	2	0.144	
45	75	16	67.5	52.5	1	0.6	NU 1009	—	—	N	—	—	32500	35500	9000	11000	50	50	52	54	—	69	71	68	1	0.6	0.284	0.289	—	—	—	—	—	—	—	
	85	19	75	55	1.1	1.1	NU 209	NJ	NUP	N	NF	NP	46000	47000	7500	9000	52	52	54	57	61	78	78	77	1	1	0.430	0.420	HJ 209	45	59	5	9.5	1.1	0.054	
	85	19	—	54.5	1.1	1.1	NU 209EG	NJ	NUP	—	—	—	63000	66500	7000	8500	—	52	54	57	61	78	—	—	1	1	0.440	—	HJ 209E	45	59.1	5	8.5	1.1	0.053	
	85	23	—	55	1.1	1.1	NU 2209	NJ	NUP	—	—	—	61500	68000	7400	8900	—	52	54	57	61	78	—	—	1	1	0.536	—	HJ 2209	45	59	5	9.5	1.1	0.054	
	85	23	—	54.5	1.1	1.1	NU 2209EG	NJ	NUP	—	—	—	76000	84500	7000	8500	—	52	54	57	61	78	—	—	1	1	0.593	—	HJ 2209E	45	59.1	5	9	1.1	0.054	
	100	25	86.5	58.5	1.5	1.5	NU 309	NJ	NUP	N	NF	NP	78500	77500	6300	7500	53.5	53.5	57	60	66	91.5	91.5	89	1.5	1.5	0.871	0.850	HJ 309	45	64	7	12.5	1.5	0.105	
	100	25	—	58.5	1.5	1.5	NU 309EG	NJ	NUP	—	—	—	97500	98500	6000	7500	—	53.5	57	60	66	91.5	—	—	1.5	1.5	0.910	—	HJ 309E	45	64.5	7	11.5	1.5	0.103	
	100	36	—	58.5	1.5	1.5	NU 2309	NJ	NUP	—	—	—	99000	104000	6100	7300	—	53.5	57	60	66	91.5	—	—	1.5	1.5	1.25	—	HJ 2309	45	64	7	15	1.5	0.115	
	100	36	—	58.5	1.5	1.5	NU 2309E	NJ	NUP	—	—	—	137000	153000	6000	7200	—	53.5	57	60	66	91.5	—	—	1.5	1.5	1.40	—	HJ 2309E	45	64.5	7	13	1.5	0.112	
	120	29	100.5	64.5	2	2	NU 409	NJ	NUP	N	NF	NP	107000	102000	5600	6700	55	55	63	66	74	110	110	102	2	2	1.67	1.64	HJ 409	45	71.8	8	13.5	2	0.176	

Note: (\*) The dimension table shows limiting speed for bearings made with machined cages. For bearings made with pressed steel cages, multiply the table limits by 0.8.