




EGF25215-E40-B

Flanged bush

Schaeffler ID:
0713835140000

Flanged bush, maintenance-free, ISO
3547, with bronze backing

Technical information

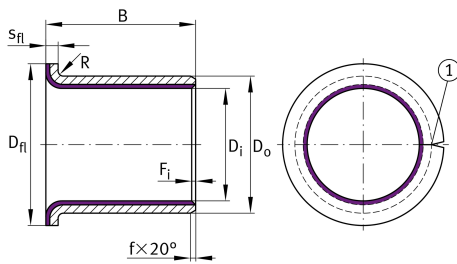

Main Dimensions & Performance Data

D_i	25 mm	Inner diameter
D_o	28 mm	Outer diameter
D_{fl}	35 mm	Outside diameter of flange
B	21.5 mm	Width
C_r	64,800 N	Basic dynamic load rating, radial
C_{0r}	115,600 N	Basic static load rating, radial
C_a	29,000 N	Basic dynamic load rating, axial
C_{0a}	51,800 N	Basic static load rating, axial
	22.404 g	Weight

Dimensions

s_{fl}	1.5 mm	Flange thickness
R_{max}	1.5 mm	Radius, max.
f	0.6 mm	Outer chamfer
$F_{i max}$	0.7 mm	Inner edge break, max.
$F_{i min}$	0.1 mm	Inner edge break, min.
s_3	1.5 mm	Wall thickness
$D_{fl OT}$	0.5 mm	Outside diameter of flange, upper tolerance
$D_{o OT}$	0.095 mm	Outside diameter, upper tolerance
$D_{fl UT}$	-0.5 mm	Outside diameter of flange, lower tolerance
$D_{o UT}$	0.055 mm	Outside diameter, lower tolerance
B_{OT}	0.25 mm	Width, upper tolerance
B_{UT}	-0.25 mm	Width, lower tolerance
$s_{fl OT}$	0.05 mm	Flange thickness, upper tolerance
$s_{fl UT}$	-0.2 mm	Flange thickness, lower tolerance
f_{OT}	0.4 mm	Outer chamfer, upper tolerance
f_{UT}	-0.4 mm	Outer chamfer, lower tolerance

Temperature range

T _{min}	-200 °C	Operating temperature min.
T _{max}	280 °C	Operating temperature max.