





GE40-SW

Spherical plain bearing

Schaeffler ID:
0066516900000

Angular contact spherical plain bearing, maintenance-free, DIN ISO 12240-2, inner ring curved surface with hard chromium coating, open design

Technical information

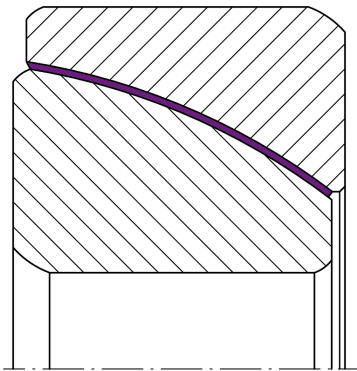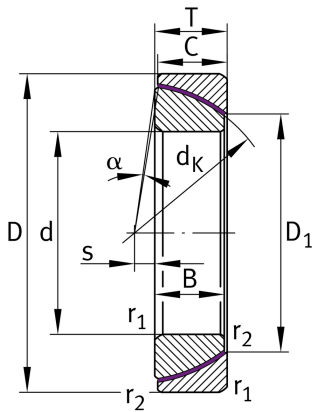


Main Dimensions & Performance Data

d	40 mm	Bore diameter bearing
D	68 mm	Outside diameter bearing
T	19 mm	Height
B	18 mm	Width Inner ring
C_r	272,000 N	Basic dynamic load rating, radial
C_{0r}	454,000 N	Basic static load rating, radial
	0.335 kg	Weight

Dimensions

d_k	60 mm	Ball diameter
D_1	46.8 mm	Bore diameter of housing washer
C	18 mm	Width Outer ring
s	1.5 mm	Plane Surface Spacing
α	1.9 °	Tilt angle
d_{OT}	0 mm	Bore diameter bearing, upper tolerance
d_{UT}	-0.012 mm	Bore diameter bearing, lower tolerance
D_{OT}	0 mm	Outside diameter, upper tolerance
D_{UT}	-0.016 mm	Outside diameter, lower tolerance
T_{OT}	0.25 mm	Height, upper tolerance
B_{OT}	0 mm	Width inner ring, upper tolerance
T_{UT}	-0.25 mm	Height, lower tolerance
B_{UT}	-0.24 mm	Width inner ring, lower tolerance
C_{OT}	0 mm	Width outer ring, upper tolerance

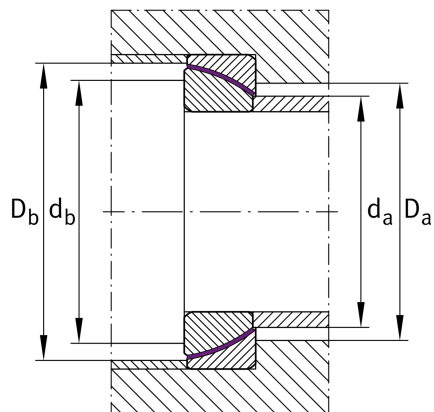

Mounting dimensions

r_{1smin}	1 mm	Edge Spacing
r_{2smin}	0.3 mm	Edge Spacing
d_{amax}	45.5 mm	Connection measure Inner ring
D_{bmin}	61 mm	Connection diameter
d_{bmax}	54 mm	Connection measure Inner ring
D_{amin}	52 mm	Housing Connection Diameter

Temperature range

T_{min}	-50 °C	Operating temperature min.
T_{max}	150 °C	Operating temperature max.