


# SUPERCLAMPS

## Mild Steel Zinc Plated:-

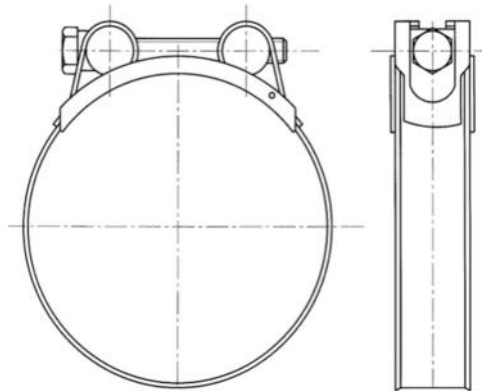

| Part No. | Adjustment mm | Band Width mm | Band Thickness mm | Recommended Torque Nm | Maximum Torque Nm | Screw Head mm | Part No. |
|----------|---------------|---------------|-------------------|-----------------------|-------------------|---------------|----------|
| JSC019MS | 17-19         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC019MS |
| JSC022MS | 20-22         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC022MS |
| JSC025MS | 23-25         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC025MS |
| JSC028MS | 26-28         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC028MS |
| JSC031MS | 29-31         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC031MS |
| JSC035MS | 32-35         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC035MS |
| JSC039MS | 36-39         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC039MS |
| JSC043MS | 40-43         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC043MS |
| JSC047MS | 44-47         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC047MS |
| JSC051MS | 48-51         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC051MS |
| JSC055MS | 52-55         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC055MS |
| JSC059MS | 56-59         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC059MS |
| JSC063MS | 60-63         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC063MS |
| JSC067MS | 64-67         | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC067MS |
| JSC073MS | 68-73         | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC073MS |
| JSC079MS | 74-79         | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC079MS |
| JSC085MS | 80-85         | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC085MS |
| JSC091MS | 86-91         | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC091MS |
| JSC097MS | 92-97         | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC097MS |
| JSC103MS | 98-103        | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC103MS |
| JSC112MS | 104-112       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC112MS |
| JSC121MS | 113-121       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC121MS |
| JSC130MS | 122-130       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC130MS |
| JSC139MS | 131-139       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC139MS |
| JSC148MS | 140-148       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC148MS |
| JSC161MS | 149-161       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC161MS |
| JSC174MS | 162-174       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC174MS |
| JSC187MS | 175-187       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC187MS |
| JSC200MS | 188-200       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC200MS |
| JSC213MS | 201-213       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC213MS |
| JSC226MS | 214-226       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC226MS |
| JSC239MS | 227-239       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC239MS |
| JSC255MS | 240-255       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC252MS |
| JSC265MS | 253-265       | 25.0          | 1.8               | 18.5                  | 25.0              | 13            | JSC265MS |

**Quality Assurance:-** **DIN**  
3017

**Corrosion Resistance:** 168 hours NSS Test

**Fastening:** A/F screw – see table

**Industry Recommendations:-**



SAE J1508 Surface Vehicle Standards-Hose Clamp Specifications, Type TB is referenced in the quality control methods for the design/manufacture of the Jubilee Superclamps Range.

**Mild Steel Zinc Plated**

**The finest hose clip  
in the world**