




# SUPERCLAMPS 304 Stainless Steel:-

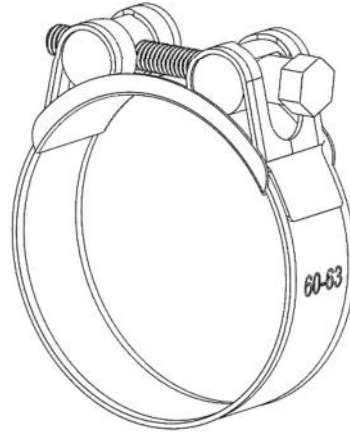

| Part No. | Adjustment mm | Band Width mm | Band Thickness mm | Recommended Torque Nm | Maximum Torque Nm | Screw Head mm | Part No. |
|----------|---------------|---------------|-------------------|-----------------------|-------------------|---------------|----------|
| JSC019SS | 17-19         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC019SS |
| JSC022SS | 20-22         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC022SS |
| JSC025SS | 23-25         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC025SS |
| JSC028SS | 26-28         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC028SS |
| JSC031SS | 29-31         | 18.0          | 0.6               | 4.5                   | 6.0               | 8             | JSC031SS |
| JSC035SS | 32-35         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC035SS |
| JSC039SS | 36-39         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC039SS |
| JSC043SS | 40-43         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC043SS |
| JSC047SS | 44-47         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC047SS |
| JSC051SS | 48-51         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC051SS |
| JSC055SS | 52-55         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC055SS |
| JSC059SS | 56-59         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC059SS |
| JSC063SS | 60-63         | 20.0          | 1.0               | 6.0                   | 8.0               | 10            | JSC063SS |
| JSC067SS | 64-67         | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC067SS |
| JSC073SS | 68-73         | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC073SS |
| JSC079SS | 74-79         | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC079SS |
| JSC085SS | 80-85         | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC085SS |
| JSC091SS | 86-91         | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC091SS |
| JSC097SS | 92-97         | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC097SS |
| JSC103SS | 98-103        | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC103SS |
| JSC112SS | 104-112       | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC112SS |
| JSC121SS | 113-121       | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC121SS |
| JSC130SS | 122-130       | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC130SS |
| JSC139SS | 131-139       | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC139SS |
| JSC148SS | 140-148       | 25.0          | 1.2               | 18.5                  | 25.0              | 13            | JSC148SS |
| JSC161SS | 149-161       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC161SS |
| JSC174SS | 162-174       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC174SS |
| JSC187SS | 175-187       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC187SS |
| JSC200SS | 188-200       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC200SS |
| JSC213SS | 201-213       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC213SS |
| JSC226SS | 214-226       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC226SS |
| JSC239SS | 227-239       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC239SS |
| JSC255SS | 240-255       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC255SS |
| JSC265SS | 253-265       | 25.0          | 1.5               | 18.5                  | 25.0              | 13            | JSC265SS |

**Quality Assurance:-** **DIN**  
3017

**Corrosion Resistance:** 1000 hours NSS Test

**Fastening:** A/F screw – see table

**Industry Recommendations:-**



SAE J1508 Surface Vehicle Standards-Hose Clamp Specifications, Type TB is referenced in the quality control methods for the design/manufacture of the Jubilee Superclamps Range.

**304 Stainless Steel**