

FAG

NJ2208-E-XL-M1

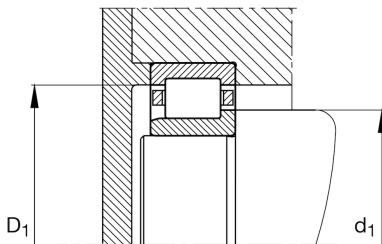
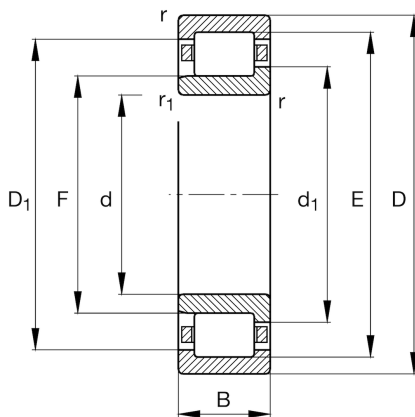
Cylindrical roller bearing

Schaeffler ID:
0190076980000

Cylindrical roller bearing NJ..-E-XL-M1, with cage, single row, semi-locating bearing, 2 ribs on outer ring, 1 rib on inner ring, type NJ

X-life

Technical information

**Main Dimensions & Performance Data**

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	23 mm	Width
C_r	83,000 N	Basic dynamic load rating, radial
C_{0r}	75,000 N	Basic static load rating, radial
C_{ur}	12,900 N	Fatigue load limit, radial
n_G	16,300 1/min	Limiting speed
n_{gr}	6,300 1/min	Reference speed
	0.541 kg	Weight

Mounting dimensions

$d_{a \min}$	47 mm	Minimum diameter shaft shoulder
$d_{a \max}$	49 mm	Maximum diameter of shaft shoulder
$D_{a \max}$	73 mm	Maximum diameter of housing shoulder
$d_{c \min}$	56 mm	Minimum shaft shoulder
$r_{a \max}$	1 mm	Maximum recess radius

Dimensions

r_{\min}	1.1 mm	Minimum chamfer dimension
$r_{1 \min}$	1.1 mm	Minimum chamfer dimension
s	1.5 mm	Axial displacement
E	71.5 mm	Raceway diameter outer ring
F	49.5 mm	Raceway diameter inner ring
$D_{1 \min}$	68.26 mm	Minimum rib diameter outer ring
d_1	53.95 mm	Maximum rib diameter inner ring

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	150 °C	Operating temperature max.

Additional information

HJ2208-E

L-washer

