

FAG

NJ2210-E-XL-TVP2


Cylindrical roller bearing

Schaeffler ID:
0167348740000Cylindrical roller bearing NJ..-E-XL-TVP2,
with cage, single row, semi-locating
bearing, 2 ribs on outer ring, 1 rib on inner
ring, type NJ

X-life


Technical information

Main Dimensions & Performance Data

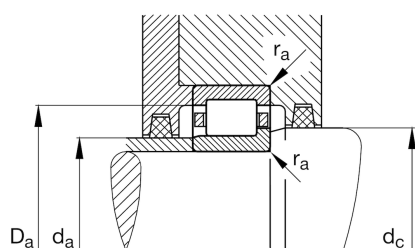


d	50 mm	Bore diameter
D	90 mm	Outside diameter
B	23 mm	Width
C_r	92,000 N	Basic dynamic load rating, radial
C_{0r}	88,000 N	Basic static load rating, radial
C_{ur}	15,300 N	Fatigue load limit, radial
n_G	11,100 1/min	Limiting speed
n_{gr}	5,300 1/min	Reference speed
	0.567 kg	Weight

Dimensions

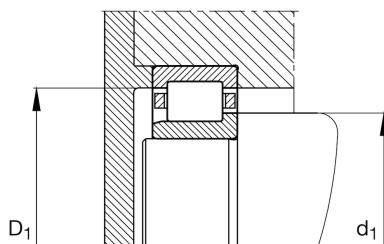

r_{min}	1.1 mm	Minimum chamfer dimension
$r_{1 min}$	1.1 mm	Minimum chamfer dimension
s	1.3 mm	Axial displacement
E	81.5 mm	Raceway diameter outer ring
F	59.5 mm	Raceway diameter inner ring
$D_{1 min}$	78.3 mm	Minimum rib diameter outer ring
d_1	64 mm	Maximum rib diameter inner ring

Mounting dimensions

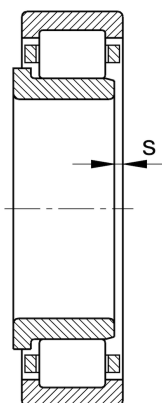

$d_{a min}$	57 mm	Minimum diameter shaft shoulder
$d_{a max}$	58 mm	Maximum diameter of shaft shoulder
$D_{a max}$	83 mm	Maximum diameter of housing shoulder
$d_{c min}$	67 mm	Minimum shaft shoulder
$r_{a max}$	1 mm	Maximum recess radius

Additional information

HJ210-E

L-washer

**Temperature range**

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.