

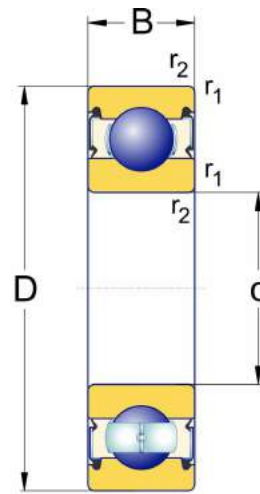


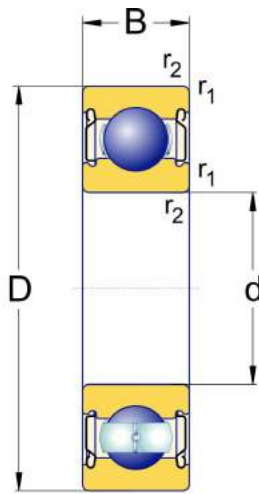

RILLENKUGELLAGER IN ZOLLABMESSUNGEN

INCH SIZED DEEP GROOVE BALL BEARINGS

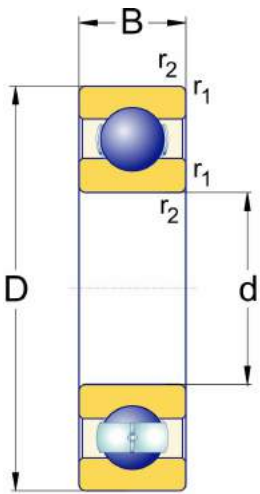

.2Z

.2RSR

Hauptabmessungen Boundary dimensions						Lagertypen Designation	Tragzahlen [kN] Load ratings [kN]		Richtdrehzahlen Speed ratings [min ⁻¹] [rpm]		m [kg]
d		D		B			dyn.	stat.	ng Fett	ng Öl	
[in]	[mm]	[in]	[mm]	[in]	[mm]		C _r	C _{0r}	ng grease	ng oil	
1 1/8	28,575	2 13/16	71,438	13/16	20,638	MJ 1 1/8.2Z	26,7	15,0	10800	--	0,347
1 1/4	31,750	2 1/4	57,150	3/8	9,525	KLNJ 1 1/4	12,8	8,700	11900	16000	0,096
				1/2	12,700	KLNJ 1 1/4.2Z	12,8	8,700	11900	--	0,128
1 1/4	31,750	2 3/4	69,850	1 1/16	17,463	LJ 1 1/4	17,8	11,2	10600	14400	0,276
						LJ 1 1/4.2RSR	17,8	11,2	7000	--	0,276
						LJ 1 1/4.2Z	17,8	11,2	10600	--	0,276
1 1/4	31,750	3 1/8	79,375	7/8	22,225	MJ 1 1/4	33,3	18,1	9800	13200	0,476
						MJ 1 1/4.2RSR	33,3	18,1	6500	--	0,476
						MJ 1 1/4.2Z	33,3	18,1	9800	--	0,476
1 3/8	34,925	2 1/2	63,500	7/16	11,113	KLNJ 1 3/8	14,4	9,4	11000	14900	0,134
						XLJ 1 3/8	16,6	10,3	11200	15000	0,194
		3	76,200	1 1/16	17,463	LJ 1 3/8	25,7	15,6	9800	13200	0,333
						LJ 1 3/8.2RSR	25,7	15,6	6500	--	0,333
		3 1/2	88,900	7/8	22,225	LJ 1 3/8.2Z	25,7	15,6	9800	--	0,333
						MJ 1 3/8	40,3	22,4	8800	11900	0,608
MJ 1 3/8.2RSR	40,3	22,4	5800	--	0,608						
MJ 1 3/8.2Z	40,3	22,4	8800	--	0,608						
1 1/2	38,100	2 5/8	66,675	7/16	11,113	KLNJ 1 1/2	15	10,3	10300	13900	0,142
						XLJ 1 1/2	16,8	11,5	10200	13800	0,202
		3 1/4	82,550	3/4	19,050	LJ 1 1/2	29,1	17,9	9000	12200	0,418
						LJ 1 1/2.2RSR	29,1	17,9	6000	--	0,418
						LJ 1 1/2.2Z	29,1	17,9	9000	--	0,418
3 1/4	95,250	15/16	23,813	MJ 1 1/2	44,5	26,3	8200	11000	0,753		
				MJ 1 1/2.2RSR	44,5	26,3	8200	--	0,753		
MJ 1 1/2.2Z	44,5	26,3	8200	--	0,753						