


AM, AI, AW

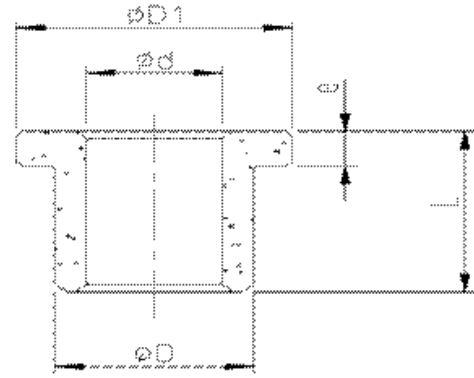

AL, AJ (with flange)

Material Chemical Component	Cu 54-56%			Sn 4-6%	Fe 39-41%			
Physical and Mechanical Performance	Oil content (%)	$\geq 18\%$	Oil density (g/cm ³)	6.2-6.8	Crushing strength (N/mm ²)	>150	Surface hardness (HB)	25-55
HMEC Type no.	Dimension							
	d		D		l		D1	e
AM 506040	50	+0.054 +0.009	60	+0.083 +0.023	40	± 0.165		
AM 506050	50	+0.054 +0.009	60	+0.083 +0.023	50	± 0.195		
AM 506070	50	+0.054 +0.009	60	+0.083 +0.023	70	± 0.23		
AM 091214	9	+0.020 +0.005	12	+0.046 +0.028	14	± 0.135		
AM 121808	12	+0.024 +0.006	18	+0.046 +0.028	8	± 0.11		
AM 142030	14	+0.024 +0.006	20	+0.056 +0.035	30	± 0.16		
AM 141814	14	+0.024 +0.006	18	+0.046 +0.028	14	± 0.135		
AM 354135	35	+0.034 +0.009	41	+0.068 +0.043	35	± 0.195		
AM 222830	22	+0.028 +0.007	28	+0.056 +0.035	30	± 0.16		
AM 637050	63	+0.04 +0.01	70	+0.089 +0.059	50	± 0.195		