

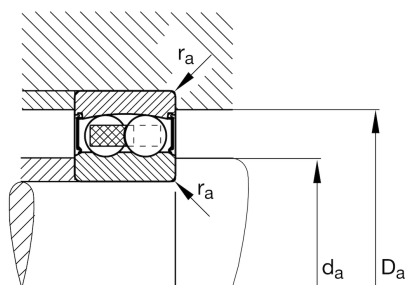
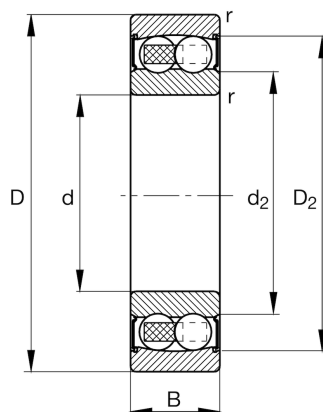
FAG

2303-2RS-TVH

Self-aligning ball bearing

Schaeffler ID:
0167065790000Self-aligning ball bearing 23...-2RS-TVH,
seals, plastic cage

Technical information

**Main Dimensions & Performance Data**

d	17 mm	Bore diameter
D	47 mm	Outside diameter
B	19 mm	Width
r_{\min}	1 mm	Minimum chamfer dimension
C_r	12,900 N	Basic dynamic load rating, radial
C_{0r}	3,200 N	Basic static load rating, radial
C_{ur}	202 N	Fatigue load limit, radial
n_G	10,100 1/min	Limiting speed
	0.002 kg	Weight

Dimensions

D_2	39.4 mm	Caliber diameter outer ring
d_2	23.9 mm	Caliber diameter inner ring

Mounting dimensions

$d_{a\min}$	22.6 mm	Minimum diameter shaft shoulder
$D_{a\max}$	41.4 mm	Maximum diameter of housing shoulder
$r_{a\max}$	1 mm	Maximum fillet radius

Calculation factors

e	0.32	Limiting value of F_a/F_r for the applicability of diff. Values of factors X and Y
Y_1	1.94	Dynamic axial load factor
Y_2	3.01	Dynamic axial load factor
Y_0	2.04	Static axial load factor

Temperature range

T_{\min}	-20 °C	Operating temperature min.
T_{\max}	100 °C	Operating temperature max.