

FAG

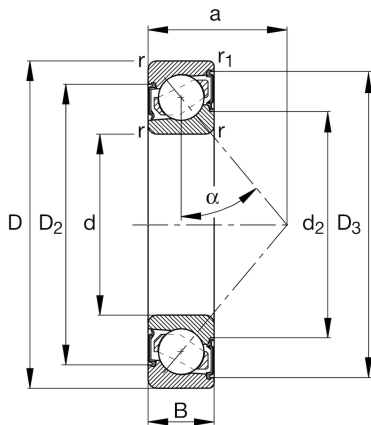
7206-B-XL-2RS-TVP

Angular contact ball bearing

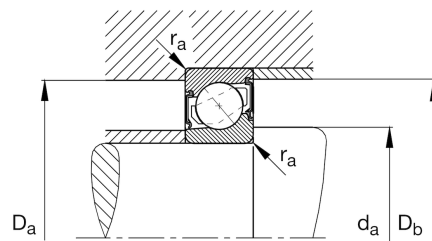
Schaeffler ID:
0206765900000Angular contact ball bearing 72..-B-
XL-2RS-TVP, single row, X-life, seals,
plastic cage

X-life

Technical information

**Main Dimensions & Performance Data**

d	30 mm	Bore diameter
D	62 mm	Outside diameter
B	16 mm	Width
C_r	23,100 N	Basic dynamic load rating, radial
C_{0r}	14,100 N	Basic static load rating, radial
C_{ur}	980 N	Fatigue load limit, radial
n_G	6,500 1/min	Limiting speed
	0.002 kg	Weight

Dimensions

r_{min}	1 mm	Minimum chamfer dimension
r_{1min}	0.6 mm	Minimum chamfer dimension
D_1	49.5 mm	Shoulder diameter on outer ring wide side face
D_2	51.7 mm	Caliber diameter on outer ring wide side face
D_3	57.1 mm	Caliber diameter on outer ring small side face
d_1	43.2 mm	Shoulder diameter on inner ring wide side face
d_2	39.5 mm	Caliber diameter on inner ring wide side face
a	27 mm	Distance between the apexes of the pressure cones
α	40 °	Contact angle

Mounting dimensions

d_{amin}	35.6 mm	Minimum diameter of shaft shoulder
D_{amax}	56.4 mm	Maximum diameter of housing shoulder
D_{bmax}	57.8 mm	Maximaler Durchmesser der Gehäuseschulter
r_{amax}	1 mm	Maximum fillet radius of shaft
r_{a1max}	0.6 mm	Maximum fillet radius of housing

Temperature range

T _{min}	-20 °C	Operating temperature min.
T _{max}	110 °C	Operating temperature max.