



FAG

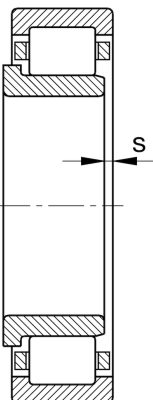
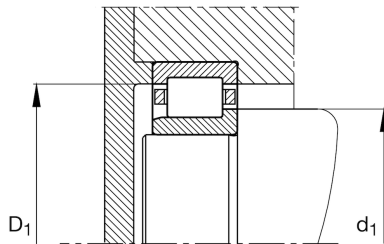
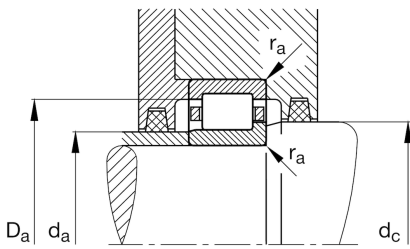
NJ2308-E-XL-TVP2

Cylindrical roller bearing

Schaeffler ID:
0167353820000Cylindrical roller bearing NJ..-E-XL-TVP2,
with cage, single row, semi-locating
bearing, 2 ribs on outer ring, 1 rib on inner
ring, type NJ

X-life

Technical information

**Main Dimensions & Performance Data**

d	40 mm	Bore diameter
D	90 mm	Outside diameter
B	33 mm	Width
C _r	132,000 N	Basic dynamic load rating, radial
C _{0r}	119,000 N	Basic static load rating, radial
C _{ur}	21,900 N	Fatigue load limit, radial
n _G	10,900 1/min	Limiting speed
n _{gr}	5,800 1/min	Reference speed
	0.951 kg	Weight

Dimensions

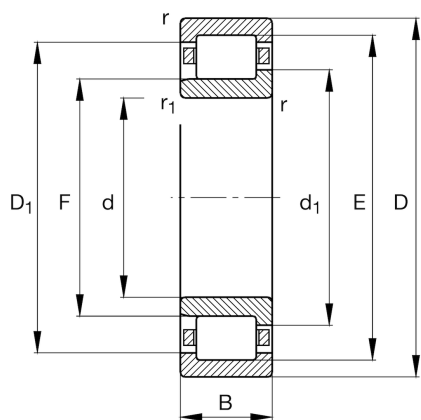
r _{min}	1.5 mm	Minimum chamfer dimension
r _{1 min}	1.5 mm	Minimum chamfer dimension
s	2.7 mm	Axial displacement
E	80 mm	Raceway diameter outer ring
F	52 mm	Raceway diameter inner ring
D _{1 min}	75.9 mm	Minimum rib diameter outer ring
d ₁	57.6 mm	Maximum rib diameter inner ring

Mounting dimensions

d _{a min}	49 mm	Minimum diameter shaft shoulder
d _{a max}	51 mm	Maximum diameter of shaft shoulder
D _{a max}	81 mm	Maximum diameter of housing shoulder
d _{c min}	60 mm	Minimum shaft shoulder
r _{a max}	1.5 mm	Maximum recess radius

Additional information

HJ2308-E	L-washer
----------	----------

**Temperature range**

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.