

FAG



NU2208-E-XL-TVP2

Cylindrical roller bearing

Schaeffler ID:
0167381950000Cylindrical roller bearing NU..-E-XL-TVP2,
with cage, single row, non-locating bearing,
2 ribs on outer ring, 0 ribs on inner ring
(smooth), type NU

X-life

Technical information

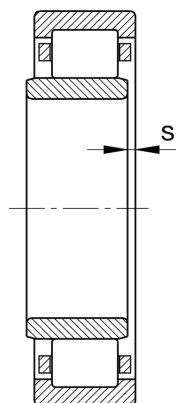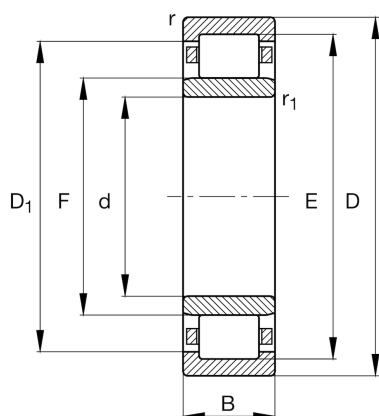

Main Dimensions & Performance Data

d	40 mm	Bore diameter
D	80 mm	Outside diameter
B	23 mm	Width
C_r	83,000 N	Basic dynamic load rating, radial
C_{0r}	75,000 N	Basic static load rating, radial
C_{ur}	12,900 N	Fatigue load limit, radial
n_G	12,500 1/min	Limiting speed
n_{gr}	6,300 1/min	Reference speed
	0.478 kg	Weight

Dimensions

r_{\min}	1.1 mm	Minimum chamfer dimension
$r_{1\min}$	1.1 mm	Minimum chamfer dimension
s	1.5 mm	Axial displacement
E	71.5 mm	Raceway diameter outer ring
F	49.5 mm	Raceway diameter inner ring
$D_{1\min}$	68.3 mm	Minimum rib diameter outer ring

Mounting dimensions

$d_{a\min}$	47 mm	Minimum diameter shaft shoulder
$d_{a\max}$	49 mm	Maximum diameter of shaft shoulder
$d_{b\min}$	52 mm	Minimum shaft shoulder
$D_{a\max}$	73 mm	Maximum diameter of housing shoulder
$r_{a\max}$	1 mm	Maximum recess radius
$r_{a1\max}$	1 mm	Maximum recess radius

Temperature range

T_{\min}	-30 °C	Operating temperature min.
T_{\max}	120 °C	Operating temperature max.

