




ZARN4580-TV

Axial/radial bearing

Schaeffler ID:
0016825040000

Needle roller/axial cylindrical roller bearings ZARN, double direction

Technical information

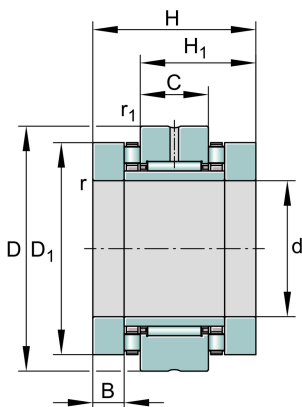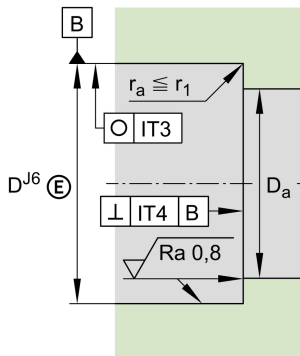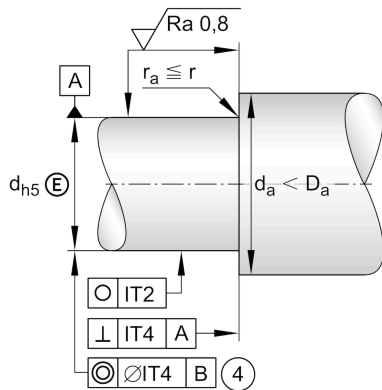

Main Dimensions & Performance Data

d	45 mm	Bore diameter
D	80 mm	Outside diameter
H	60 mm	Height
C _a	61,000 N	Basic dynamic load rating, axial
C _{0a}	177,000 N	Basic static load rating, axial
C _r	38,000 N	Basic dynamic load rating, radial
C _{0r}	74,000 N	Basic static load rating, radial
C _{ua}	15,500 N	Fatigue load limit, axial
C _{ur}	10,400 N	Fatigue load limit, radial
n _{G Oil}	4,000 1/min	Limiting speed for oil lubrication
n _{G Grease}	1,500 1/min	Limiting speed for grease lubrication
M _{RL}	1.2 Nm	Bearing friction torque
	1.134 kg	Weight

Dimensions

H ₁	42.5 mm	Height outer ring over wave washer
c _{aL}	3,000 N/μm	Rigidity axial
c _{kL}	1,340 Nm/mrad	Tilting stiffness
C	25 mm	Width, outer ring
M _m	5.33 kg * cm ²	Mass moment of inertia
	1 μm	Axial runout
D ₁	70 mm	Rip diameter shaft washer
radial	ZMA45/68	Locknut 1
axial	AM45	Locknut 2
M _A	65 Nm	Tightening torque nut
B	11.5 mm	Width, inner ring
	15,112 N	Preload force axial
r _{min}	0.3 mm	Minimum chamfer dimension
r _{1 min}	0.6 mm	Minimum chamfer dimension

Mounting dimensions

$D_{a \max}$	71 mm	Maximum diameter of housing shoulder
$d_{a \min}$	60 mm	Minimum diameter shaft shoulder